
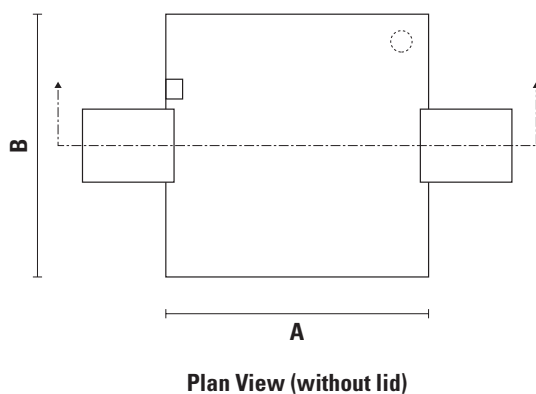


- > typically installed after a pre-treatment tank.
- > this tank holds only a small amount of water and is installed to allow easy access so that a sample can be taken of the waste water flowing through before discharge to sewer.

## Above-ground or Below-ground

Capacity litres	Dimensions mm			
	Length	Width	Water	Height
9	300	300	100	700

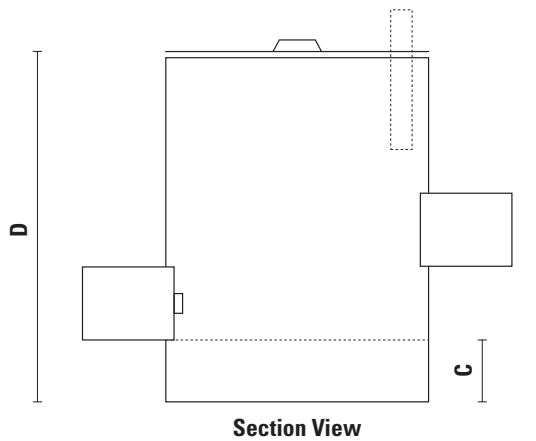

## Testing Sump model VP11

- > Manufactured from 6mm Polyvinyl Chloride (PVC), or Polypropylene (PP), this tank is suitable for above or below-ground installations
- > Above-ground tanks supplied with a loose fitting lid
- > Size of outlet pipe and inlet pipe configuration to be nominated at time of order
- > Cement mortar Test Block to be supplied and fitted by Trade Waste inspector
- > When installed below-ground a suitable cover should be fitted on top